

NAG

LEVELLING PADS


- Available in 3 thicknesses (2,0, 3,0 and 5,0 mm), can also be overlapped to obtain different thicknesses and thus effectively level the patio substructure
- The EPDM material guarantees excellent durability, is not subject to sagging in time and does not suffer from exposure to sunlight



CODES AND DIMENSIONS

CODE	B	L	s	B	L	s	density	shore	pcs
	[mm]	[mm]	[mm]	[in]	[in]	[in]	[kg/m ³] [lb/ft ³]		
NAG60602	60	60	2	2.36	2.36	0.08	1220 76.16	65	50
NAG60603	60	60	3	2.36	2.36	0.12	1220 76.16	65	30
NAG60605	60	60	5	2.36	2.36	0.20	1220 76.16	65	20



Application temperature from -35°C | +90°C.

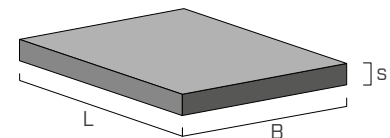

SHIM SLOT

STEEL SPACERS FOR SLOT CONNECTOR


- Galvanised steel SHIM spacers have been specially developed to allow greater tolerances during milling for the SLOT connector, but are also suitable for other applications

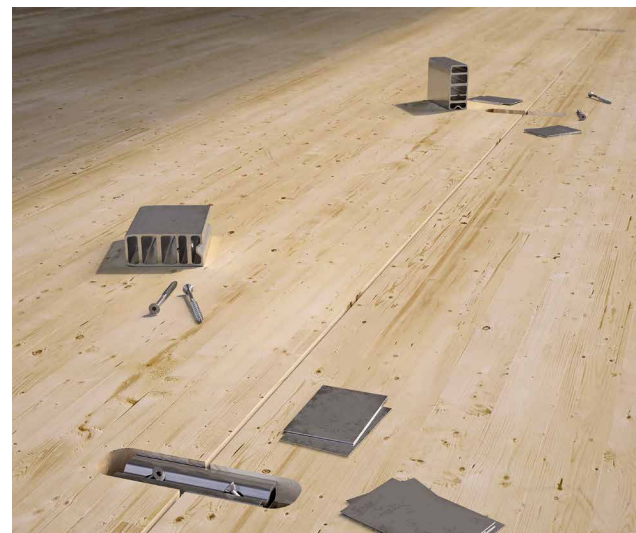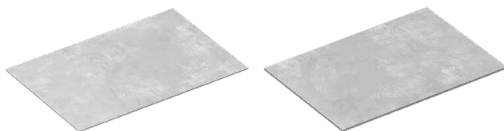

CODES AND DIMENSIONS

CODE	B	L	s	B	L	s	pcs
	[mm]	[mm]	[mm]	[in]	[in]	[in]	
SHIMS609005	89	60	0,5	3 1/2	2 3/8	0.02	100
SHIMS609010	89	60	1	3 1/2	2 3/8	0.04	50

Material: bright zinc plated carbon steel.



SLOT

CONNECTOR FOR STRUCTURAL PANELS

For further details, see the "PLATES AND CONNECTORS FOR TIMBER" catalogue, available in the "Catalogues" section of the website www.rothoblaas.com.

