


SG 230

DEVICE FOR MILLED CHAIN

- Vertical notch depth: **230 mm | 9 1/16"**
- Horizontal notch depth: **285 mm | 11 1/4"**
- Notch width per pass: **6 - 21 mm | 1/4" - 13/16"**
- Notch length per pass: **50 mm | 2"**
- Weight: **8,7 kg | 19.2 lbs**



1

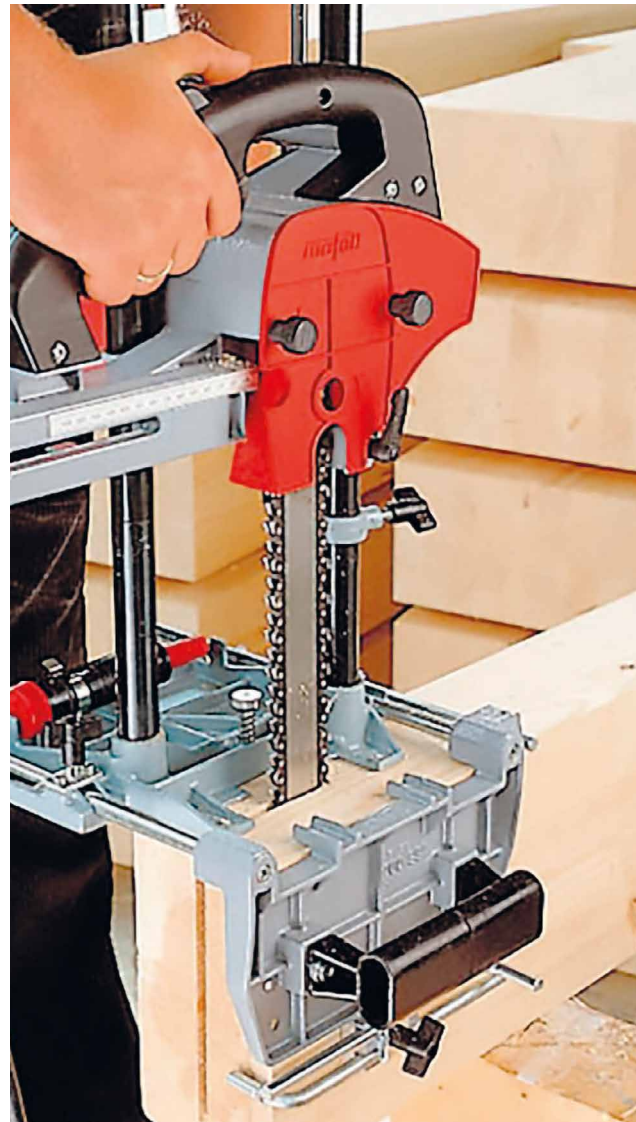

CODES AND DIMENSIONS

CODE	description	pcs
1 MA200990	SG230 chain slot mortising device without mortiser	1


ACCESSORIES FOR ALUMIDI AND ALUMAXI



1



2



3


CODE	description		pcs
1 MA091383	chain bar for mortising width 6-7 mm 0.236 - 0.276 in	ALUMIDI	1
2 MA091378	chain for mortising width 7 mm 0.276 in	ALUMIDI	1
3 MA091686	chain pinion for mortising width 6-7 mm 0.236 - 0.276 in	ALUMIDI	1
1 MA091382	chain bar for mortising width 10-11 mm 0.394 - 0.433 in	ALUMAXI	1
2 MA091376	chain for mortising width 11 mm 0.433 in	ALUMAXI	1
3 MA091688	chain pinion for mortising width 10-11 mm 0.394 - 0.433 in	ALUMAXI	1

The LS 103 chain mortiser and relative accessories must be ordered separately.

ALUMIDI
CONCEALED BRACKET
WITH AND WITHOUT
HOLES



ALUMAXI
CONCEALED BRACKET
WITH AND WITHOUT
HOLES



For more information, see the "PLATES AND CONNECTORS FOR TIMBER" catalogue, available in the "Catalogues" section of the website www.rothoblaas.com.