

AOS01 + SHIELD 2


ANCHOR POINT FOR TRAPEZOIDAL METAL ROOFS

FAST

Easy installation because it is configured as a single plate.

COMPLETE

The package includes fasteners and cellular rubber gaskets, to ensure waterproofing.

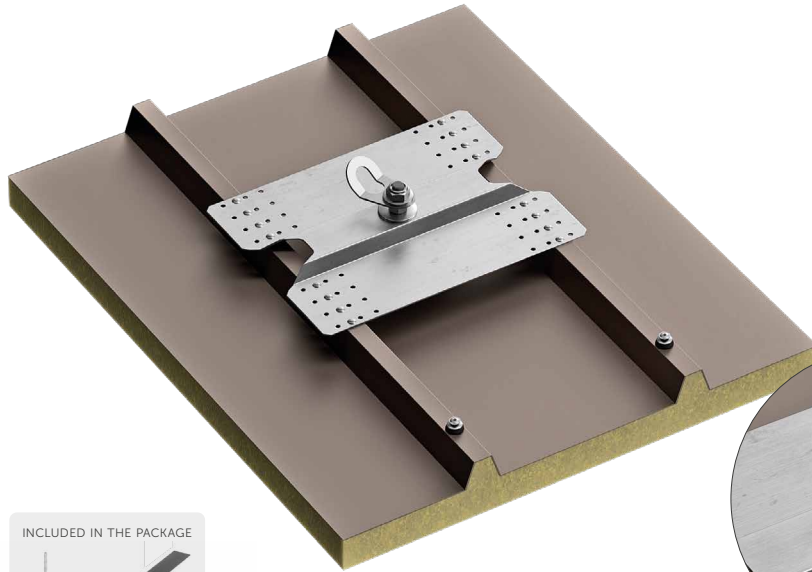

EN 795:2012 A	CEN/TS 18415:2013	UNI 11578:2015 A	AS/NZS 5532:2013	AS/NZS 1891.4:2009
---------------	-------------------	------------------	------------------	--------------------





MAXIMUM NUMBER OF USERS



LOAD DIRECTION



TYPES OF APPLICATION



TECHNICAL DATA*

substructure	minimum thickness EN 795 TYPE A	fastening systems included
Fe	0,5 mm	rivet 6,3 x 20,2 mm with EPDM washer (x 16)
Al	0,7 mm	
Al	1,0 mm	

substructure	minimum thickness AS/NZS 5532:2013	fastening systems included ⁽¹⁾
Fe	0,42 mm	rivet 6,3 x 20,2 mm with EPDM washer (x 14)

⁽¹⁾ FASTENING SYSTEMS NOT INCLUDED: 2 x Metal Tek 14 g x 75 mm for steel beams or 2 x TBSEVO08120 for timber beams

* The values indicated are the result of experimental tests carried out under the supervision of third parties in accordance with the standards referred to. For a correct calculation report with minimum distances according to the standard requirements, the substructure must be checked by a qualified engineer before installation.

SHIELD 2 | CODES AND DIMENSIONS

CODE	material		B [mm] [in]	H [mm] [in]	L [mm] [in]	pcs	
SHIELD2	AISI 304 stainless steel grade 1.4301	A2 AISI 304	420 16 9/16	65 2 9/16	322 12 11/16	1	
SHIELD2A4	AISI 316 stainless steel grade 1.4401	A4 AISI 316	420 16 9/16	65 2 9/16	322 12 11/16	1	
AOS01	AISI 304 stainless steel grade 1.4301	A2 AISI 304	60 2 3/8	-	98 3 7/8	1	
AOS01A4	AISI 316 stainless steel grade 1.4401	A4 AISI 316	60 2 3/8	-	98 3 7/8	1	