



TRIPODS AND CRANES

TRI

MOBILE DEVICE WITH THREE FEET FOR LOWERING, LIFTING AND RECOVERY

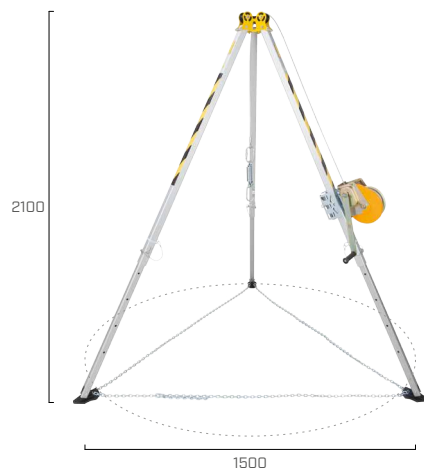

TRI2115

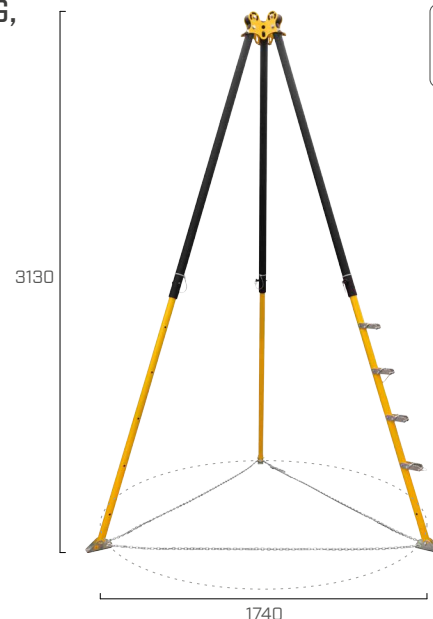

TRI3117

CODES AND DIMENSIONS

		TRI2115	TRI3117
description		tripod H _{max} = 210 cm	tripod H _{max} = 313 cm
materials		painted aluminium/zinc plated steel/polyamide	painted aluminium/zinc plated steel/stainless steel/polyamide
height	[cm]	153 - 210	197 - 313
foot diameter	[cm]	109 - 150	112 - 174
space between feet	[cm]	200	206
weight	[kg]	15,45	28,7
anchor points		3	3
number of workers		3	3
transport dimensions	[cm]	175 x 25 x 25	226 x 33 x 30

CODE	description	material	weight [kg]	pcs
TRIUB	universal adapter for attaching accessories	zinc-plated steel	2,25	1

CODE	description	standard	cable length		cable diameter		cable type	ratio	weight	max. load capacity	pcs
			[m]	[ft]	[mm]	[in]			[kg]	[kg]	
TRIDAVFAL15B	adapter for retractable device TRIDAVFAL15	-	-	-	-	-	-	-	-	-	1
TRIDAVFAL15	retractable fall arrest device	EN 360; EN1496-B	15	49' 2 1/2"	4,8	0.19	7 x 19 + IWRC	1:8,8	11,0	140	1
TRIDAVFAL25B	adapter for retractable device TRIDAVFAL25	-	-	-	-	-	-	-	-	-	1
TRIDAVFAL25	retractable fall arrest device	EN 360; EN1496-B	25	82' 1/4"	4,8	0.19	7 x 19 + IWRC	1:7,4	15,0	140	1
TRIDAVWIN30E	automatic electric winch	-	30	98' 5 1/8"	6	0.24	steel	-	21	500	1
TRIDAVWIN15AC	automatic cordless winch	-	15	49' 2 1/2"	5	0.20	steel	-	10	140	1
TRIDAVWIN520	lifting winch	-	20	65' 7 3/8"	6,3	0.25	6 x 19 + NFC	1:6	13,0	140	1
TRIDAVWIN525	lifting winch	-	25	82' 1/4"	6,3	0.25	6 x 19 + NFC	1:5	14,0	140	1
TRIDAVWINU	universal winch for textile ropes	EN 1891-B	unlimited		10	0.39	textile static rope	1:40	-	-	1
TRIDAVWIN725	winch with recovery	EN 1496-B	25	82' 1/4"	6,3	0.25	6 x 19 + NFC	1:7,2	22,5	200	1
TRIDAVWIN735	winch with recovery	EN 1496-B	35	114' 10"	6,3	0.25	6 x 19 + NFC	1:7,2	24,5	200	1
TRIDAVWIN745	winch with recovery	EN 1496-B	45	147' 7 5/8"	6,3	0.25	6 x 19 + NFC	1:7,2	25,3	200	1
TRIDAVWIN750	winch with recovery	EN 1496-B	50	164' 1/2"	6,3	0.25	6 x 19 + NFC	1:7,2	26,2	200	1

■ ACCESSORIES INSTALLATION DIAGRAM



■ COMPATIBLE DEVICES

