


DRYWALL SCREW

OPTIMISED GEOMETRY


Bugle head and phosphate-coated steel; ideal for fastening sheets of drywall.

FULLY FINE THREADED


Fully fine threaded screw, ideal for fastening on sheet metal supports.

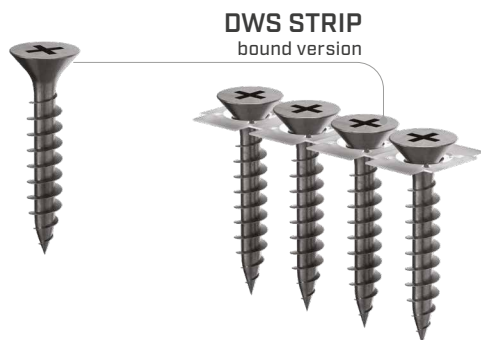

DIAMETER [mm]	3,5 (3,5 4,2)	12
LENGTH [mm]	25 (25 65)	200
SERVICE CLASS	SC1	
ATMOSPHERIC CORROSIVITY	C1	
WOOD CORROSIVITY	T1	
MATERIAL	PO PHOSPHATED	phosphate-coated carbon steel

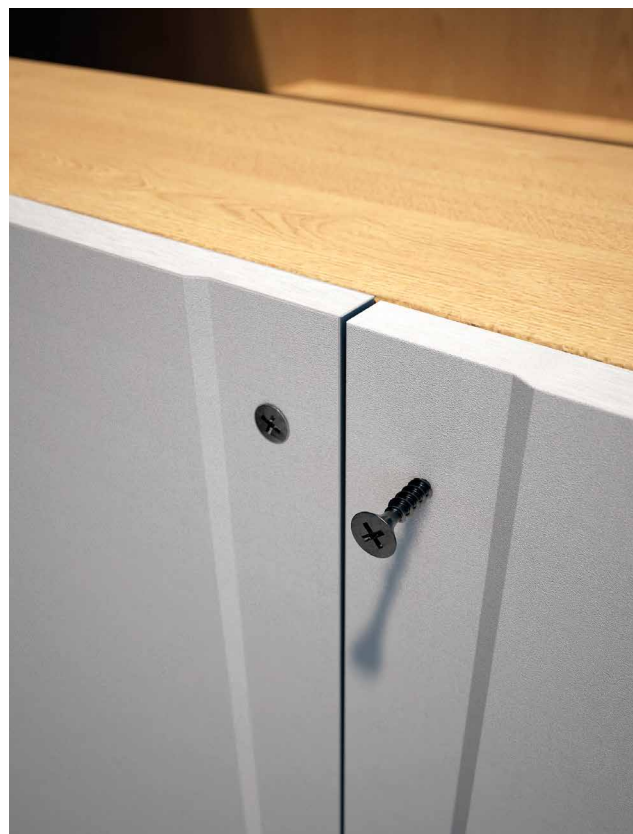

GEOMETRY




CODES AND DIMENSIONS

DWS BULK SCREWS - sheet-metal substructure




d ₁ [mm]	CODE	L [mm]	pcs
3,5 PH 2	FE620001	25	1000
	FE620005	35	1000
	FE620010	45	500
	FE620015	55	500
4,2 PH 2	FE620020	65	200

DWS STRIP - fine thread for sheet metal substructures up to max. 0.75 mm




d ₁ [mm]	CODE	L [mm]	pcs
3,5 PH 2	HH10600212	25	10000
	HH10600213	30	10000
	HH10600214	35	10000
	HH10600215	40	10000
	HH10600216	45	10000
	HH10600217	55	8000

DWS STRIP - coarse thread for timber substructures



d ₁	CODE	L	pcs
[mm]		[mm]	
3,9 PH 2	HH10600221	25	10000
	HH10600222	30	10000
	HH10600223	35	10000
	HH10600224	40	10000
	HH10600225	45	10000
	HH10600226	55	8000

DWS STRIP - fine thread and ribbed head for gypsum board



d ₁	CODE	L	pcs
[mm]		[mm]	
3,9 PH 2	HH10600227	22	10000
	HH10600228	30	10000
	HH10600229	35	10000
	HH10600230	45	10000

For more information, see the "TOOLS FOR TIMBER CONSTRUCTION" catalogue, available in the "Catalogues" section of the website www.rothoblaas.com.