

TVM

CONNECTOR FOR DECKING

FOUR VERSIONS

Different sizes for applications on boards with different thickness and gaps of varying width. Black version for complete concealment.

DURABILITY


The stainless steel ensures high corrosion-resistance. The micro-ventilation between the boards helps the durability of the wooden elements.

ASYMMETRIC GROOVING

Ideal for boards with asymmetrical "female-female" groove cuts. Ribbing on the surface of the connector ensures excellent stability.



BOARDS

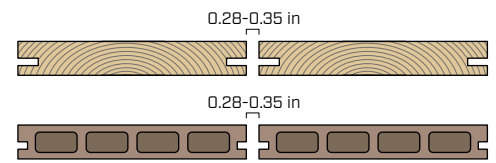

FASTENING ON



timber



WPC



aluminium

MATERIAL



A2 | AISI304 austenitic stainless steel (CRC II)



stainless steel with colored organic coating



TVM1



TVM2



TVM3



TVMN4



FIELDS OF USE

Use in aggressive outdoor environments. Fastening timber or WPC boards on substructures in wood, WPC or aluminium.