


## DRYWALL SCREW

### OPTIMISED GEOMETRY


Bugle head and phosphate-coated steel; ideal for fastening sheets of drywall.

### FULLY FINE THREADED


Fully fine threaded screw, ideal for fastening on sheet metal supports.

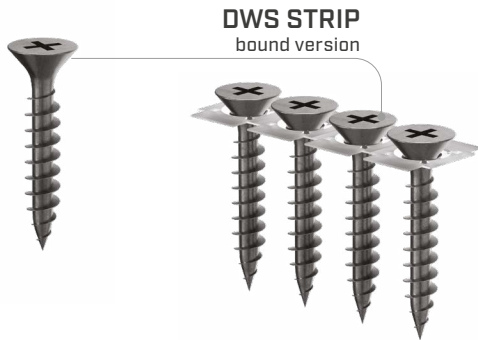

DIAMETER [mm]	3,5 (3,5 4,2)	12
LENGTH [mm]	25 (25 65)	200
SERVICE CLASS	SC1	
ATMOSPHERIC CORROSIVITY	C1	
WOOD CORROSIVITY	T1	
MATERIAL	phosphate-coated carbon steel	

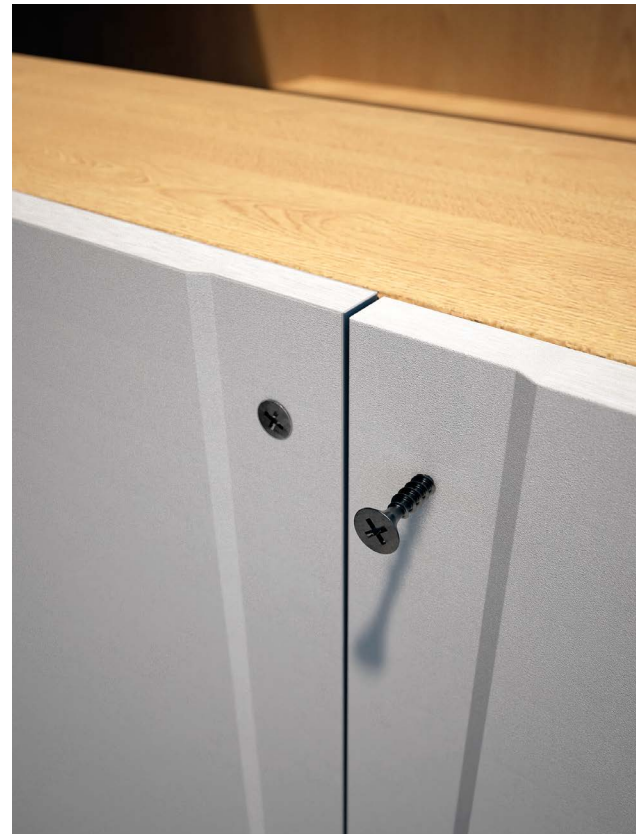

### GEOMETRY



## CODES AND DIMENSIONS

### DWS BULK SCREWS - sheet-metal substructure

	d <sub>1</sub> [mm]	CODE	L [mm]	pcs
3,5 PH 2		FE620001	25	1000
		FE620005	35	1000
		FE620010	45	500
		FE620015	55	500
4,2 PH 2		FE620020	65	200

### DWS STRIP - fine thread for sheet metal substructures up to max. 0.75 mm

	d <sub>1</sub> [mm]	CODE	L [mm]	pcs
3,5 PH 2		HH10600212	25	10000
		HH10600213	30	10000
		HH10600214	35	10000
		HH10600215	40	10000
		HH10600216	45	10000
		HH10600217	55	8000

### DWS STRIP - coarse thread for timber substructures

	d <sub>1</sub> [mm]	CODE	L [mm]	pcs
3,9 PH 2		HH10600221	25	10000
		HH10600222	30	10000
		HH10600223	35	10000
		HH10600224	40	10000
		HH10600225	45	10000
		HH10600226	55	8000

### DWS STRIP - fine thread and ribbed head for gypsum board

	d <sub>1</sub> [mm]	CODE	L [mm]	pcs
3,9 PH 2		HH10600227	22	10000
		HH10600228	30	10000
		HH10600229	35	10000
		HH10600230	45	10000

For more information, see the "TOOLS FOR TIMBER CONSTRUCTION" catalogue, available in the "Catalogues" section of the website [www.rothoblaas.com](http://www.rothoblaas.com).