

I H-RAIL VERTICAL



RAIL SYSTEM FOR VERTICAL USE ON LADDER

FUNCTIONAL

The sliding device with integrated energy absorber allows continuous ascent and descent in safe and comfortable conditions.

DURABLE

The elements in AISI 304 stainless steel and aluminium alloy provide excellent resistance to corrosion.

PRACTICAL

It is a user-friendly system comprised of few elements that are easy to install.

EN 353-1:2014 + A1:2018	RFU 11.119	AS/NZS 1891.3:2020
-------------------------------	------------	-----------------------




**MAXIMUM NUMBER
OF USERS**



LOAD DIRECTION



**TYPES OF
APPLICATION**





fall protection

EN
353-1:2014
+ A1:2017

AS/NZS
1891.3.2020

RfU 11.119

maximum number
of users

no.



minimum
distance
between
operators

 $z_{\min}$ [m]

3

3

minimum
span

 $x_{\min}$ [m]

0,5


0,5

maximum
span

 $x_{\max}$ [m]

3

3

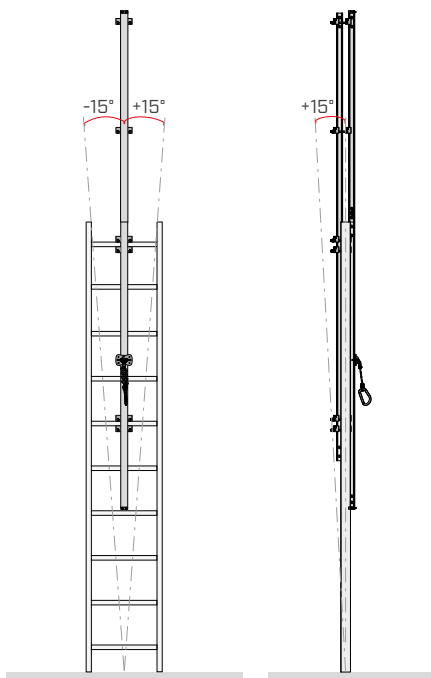

A4
AISI 316

For versions in A4, see the page on components (see page 76).

